

# Installation Instruction

## Before You Begin

---

1. Shut off the main water supply.
2. Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
3. To avoid the faucet from jamming, DO flush the water pipe before installation.
4. After installation, make sure every joint is safely sealed (NO LEAKAGE).
5. Make sure to connect the hot/cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.
6. It is recommended that installation of the product be done by a professional plumber.

## Cleaning & Maintenance


---

To keep product clean and shiny follow the instruction below.

1. Flush with clean water and dry with soft cloth only.
2. Do not use any detergent, polisher, sane-cloth, or a scraper.
3. Do not use acid detergent.

## Installation

---

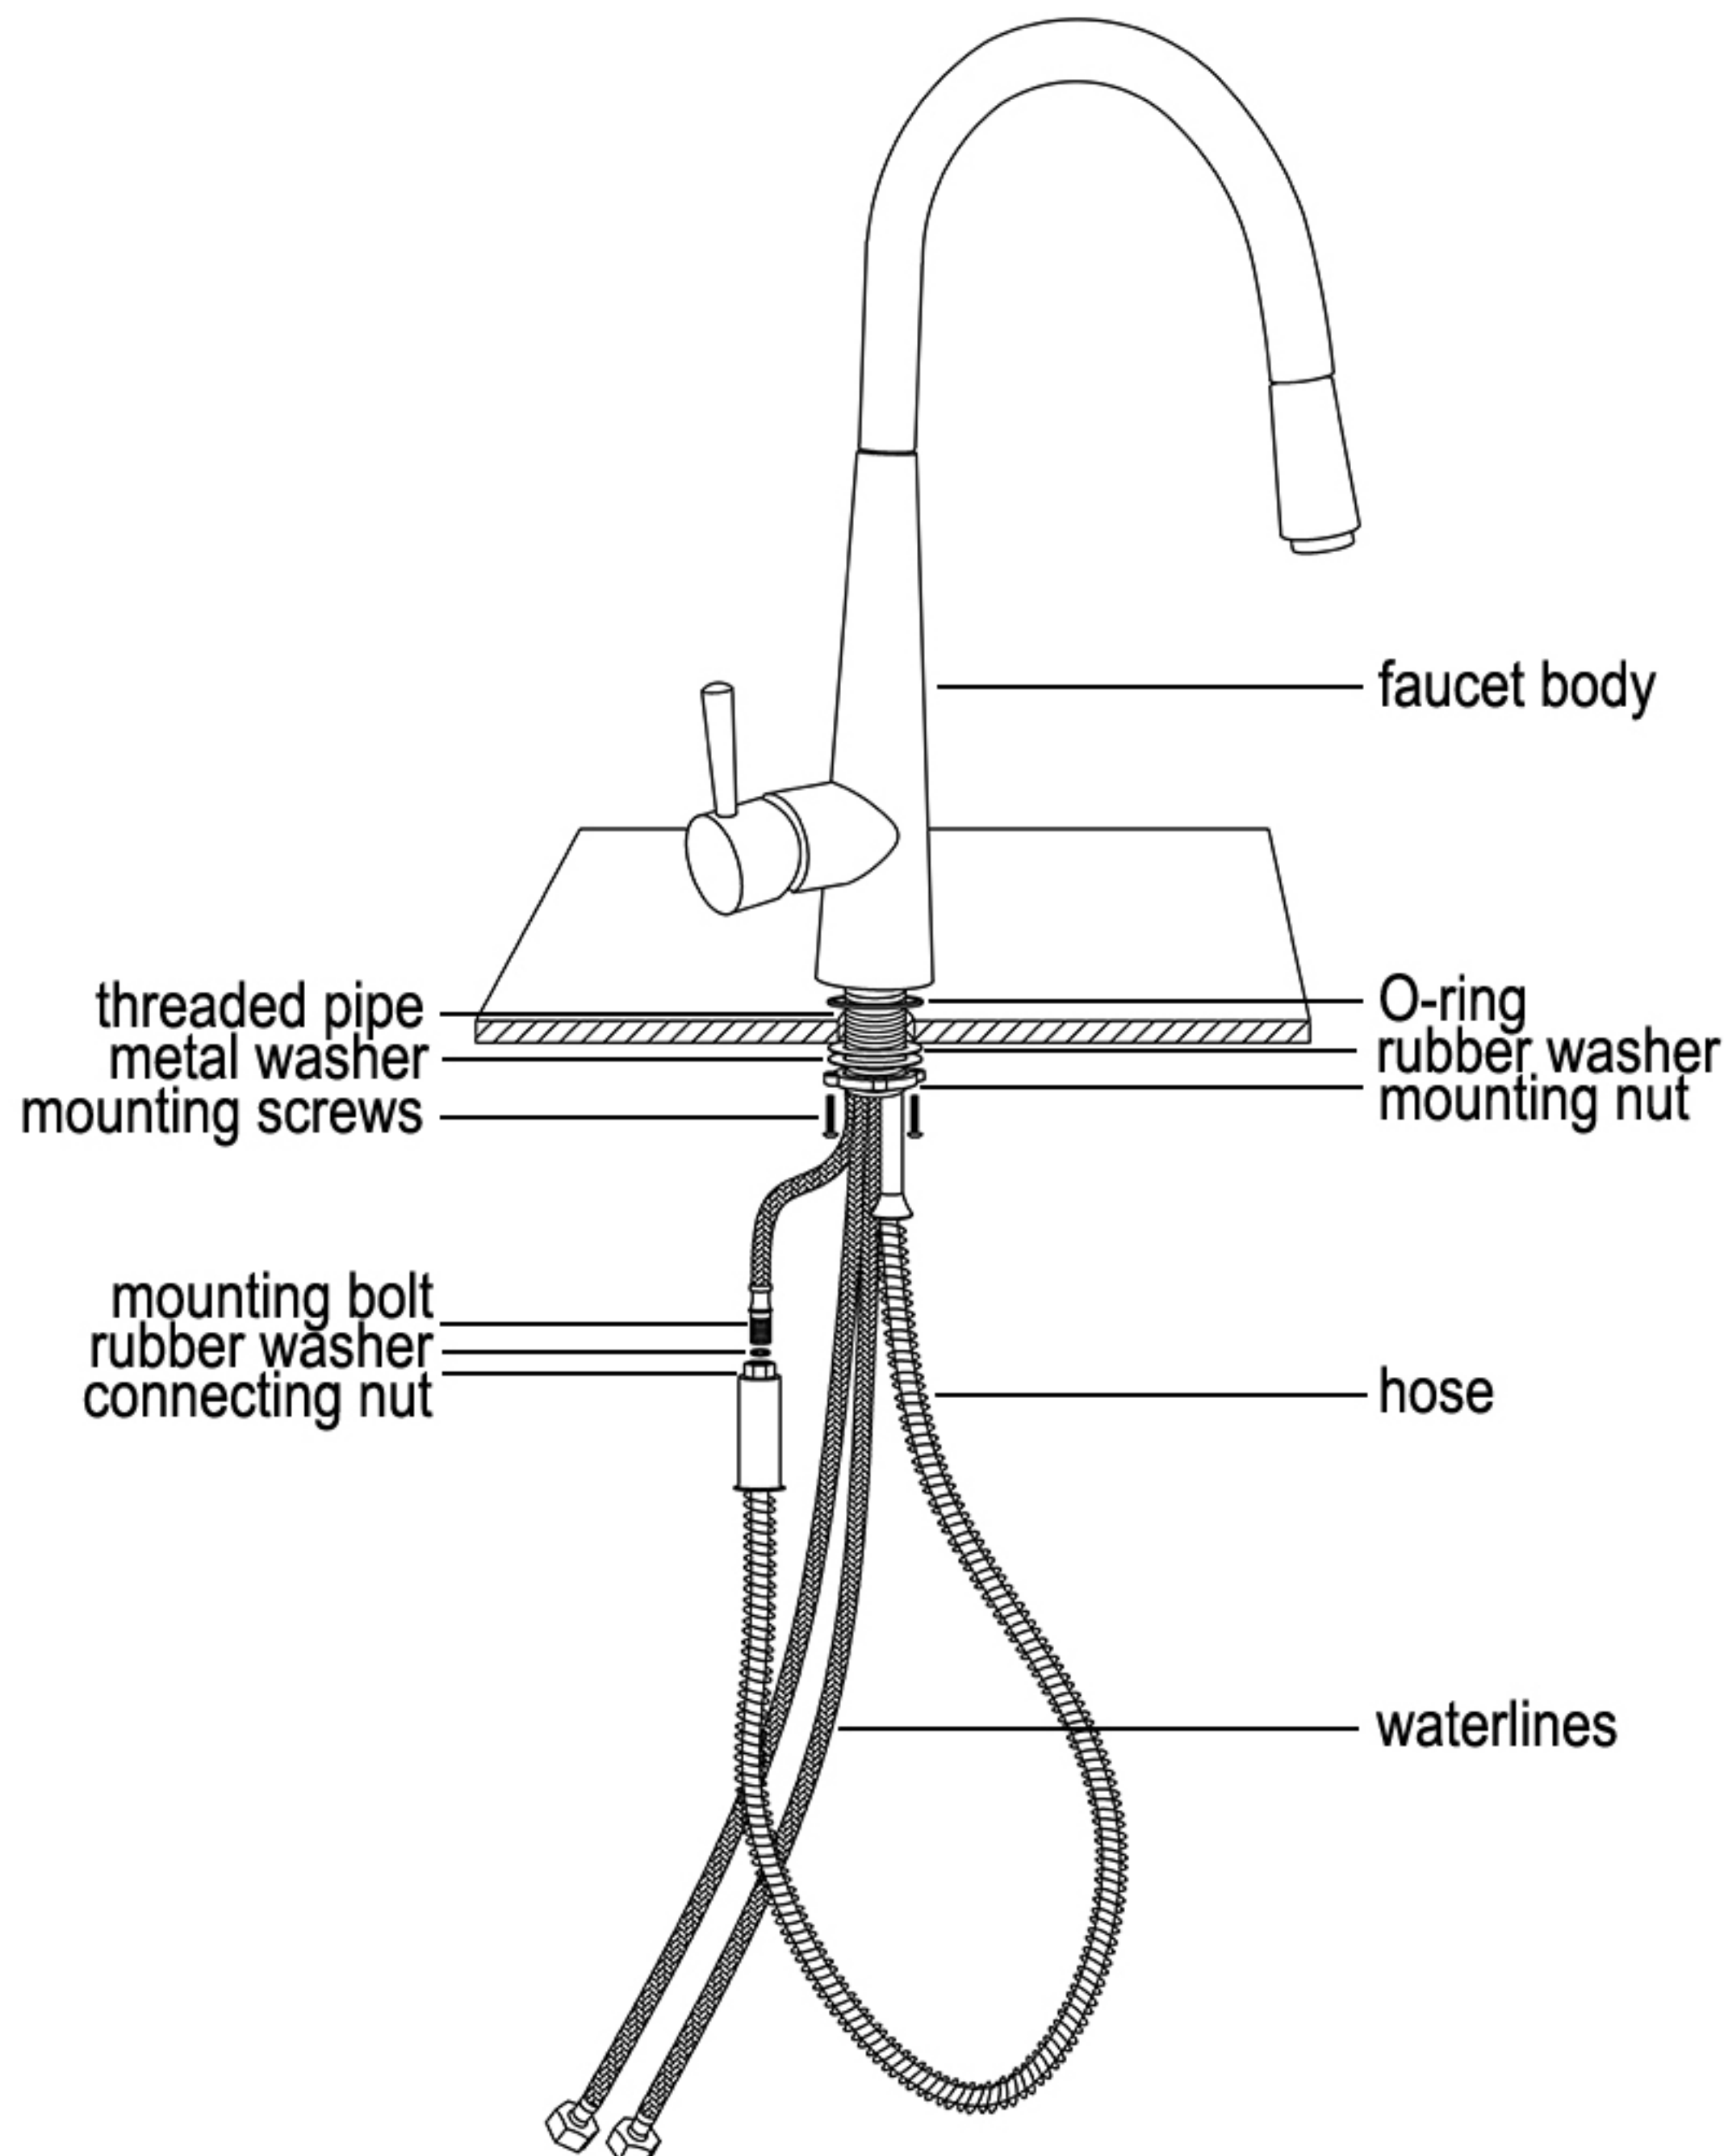

1. Fit O-ring into the bottom groove of faucet body.
2. Insert waterlines, mounting bolt, hose, and threaded pipe into the drilled hole of the counter top.
3. Put rubber washer and metal washer onto the threaded pipe and screw in the mounting nut.
4. Adjust faucet body properly and fix with mounting screws securely.
5. Put on rubber washer. Then connect and fix the hose with mounting bolt using connecting nut.