

# Installation Instruction

## Before You Begin

---

1. Shut off the main water supply.
2. Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
3. To avoid the faucet from jamming, DO flush the water pipe before installation.
4. After installation, make sure every joint is safely sealed (NO LEAKAGE).
5. Make sure to connect the hot/cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.
6. It is recommended that installation of the product be done by a professional plumber.

## Cleaning & Maintenance


---

To keep product clean and shiny follow the instruction below.

1. Flush with clean water and dry with soft cloth only.
2. Do not use any detergent, polisher, sane-cloth, or a scraper.
3. Do not use acid detergent.

## Installation

---

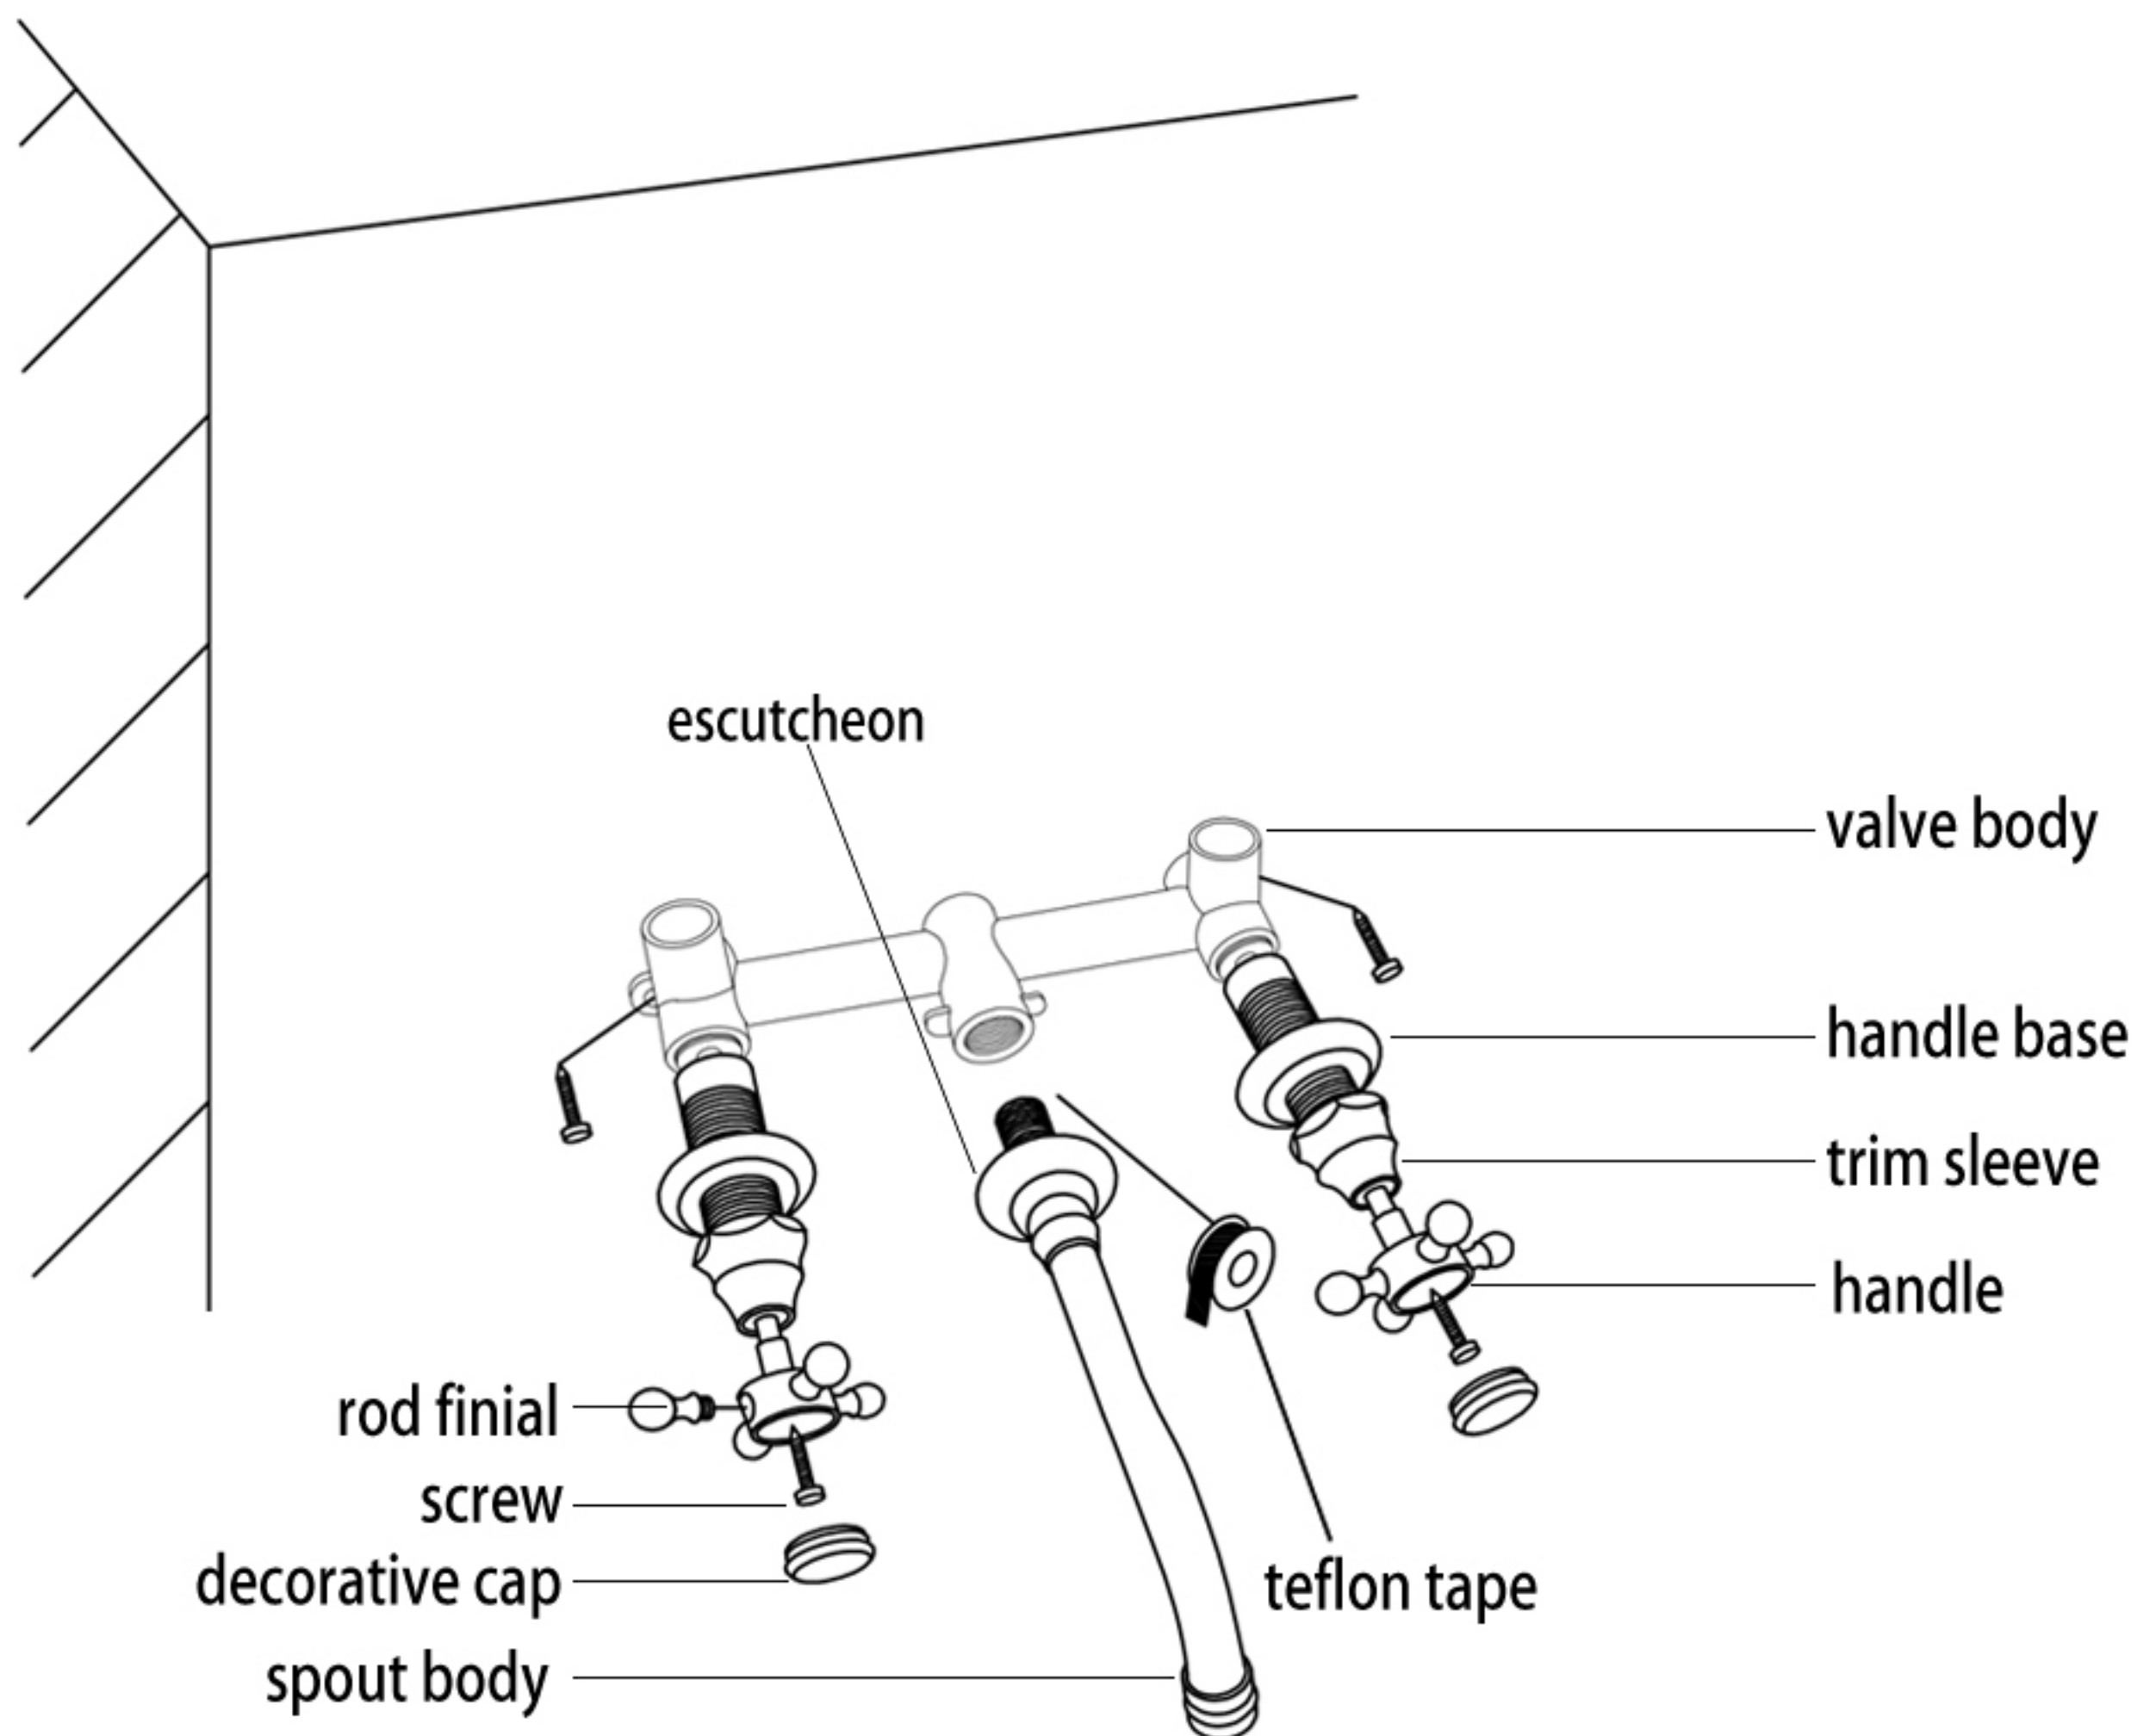

1. Remove one rod finial and decorative cap to disassemble the handle and trims from the valve body.
2. Fix the valve body into the wall with screws. Make sure the valve body is completely level.
3. Connect the hot and cold water inlets of the valve body to the main water supply. (Solid copper pipes are recommended for the connection.)
4. When the wall is finished, wrap teflon tape around the pipe thread of the spout and screw the spout into the valve outlet. Make sure the pre-assembled escutcheon is against the finished wall.
5. Fix the handle base onto the valve firmly against the finished wall. Install the trim sleeve and handle, fixing the screw and put on the decorative cap.