

# Installation Instruction

## Before You Begin


1. Shut off the main water supply.
2. Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
3. To avoid the faucet from jamming, DO flush the water pipe before installation.
4. After installation, make sure every joint is safely sealed (NO LEAKAGE).
5. Make sure to connect the hot/cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.
6. It is recommended that installation of the product be done by a professional plumber.

## Cleaning & Maintenance

To keep product clean and shiny follow the instruction below.

1. Flush with clean water and dry with soft cloth only.
2. Do not use any detergent, polisher, sane-cloth, or a scraper.
3. Do not use acid detergent.

## Installation

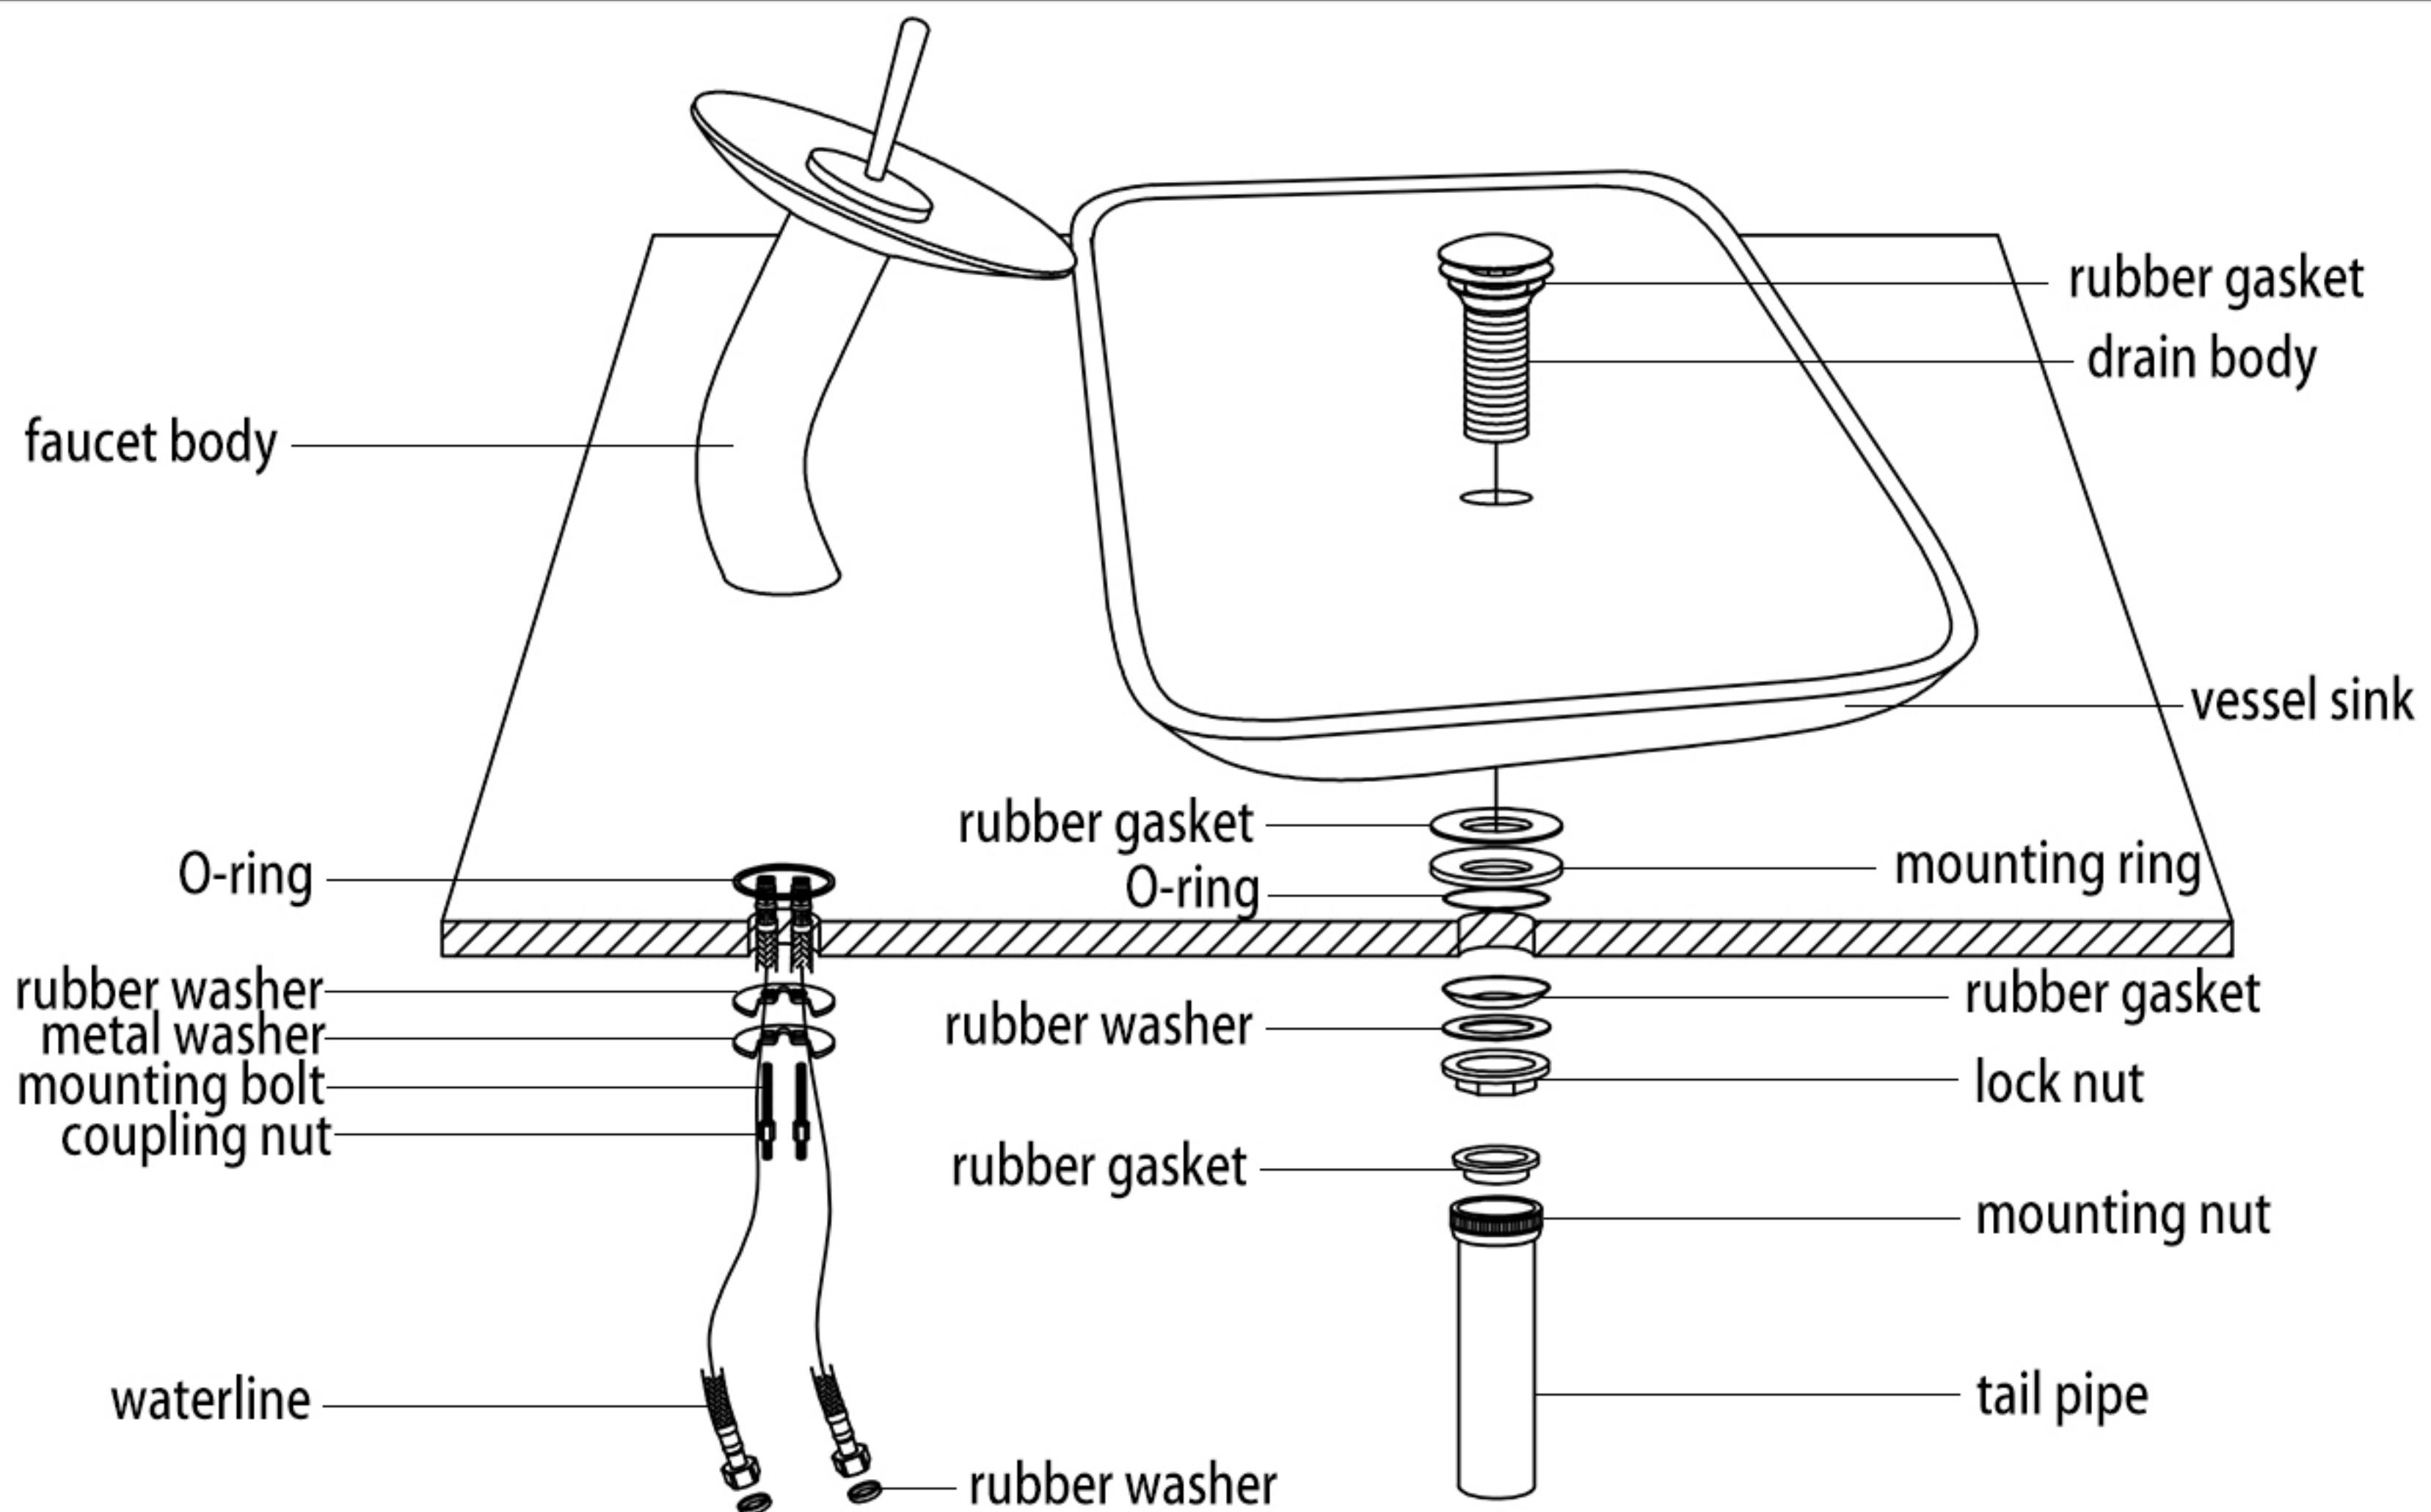

1. Fit O-ring into the bottom groove of faucet body.
2. Screw waterlines and mounting bolts into the corresponding screw holes of faucet body.
3. Insert waterlines and mounting bolts into the drilled hole of the countertop.
4. Slide the rubber washer and metal washer onto the mounting bolts and thread the coupling nuts onto the mounting bolts.
5. Adjust the faucet body correctly and tighten the coupling nuts securely.
6. Put on rubber washers and connect the waterlines to the main water supply.
7. Fit O-ring into the bottom groove of the mounting ring. Place the mounting ring over the drain hole in the countertop, applying adhesive.
8. Position the sink drain opening over the drain hole and gently rest the vessel sink on the mounting ring.
9. Insert the drain body through the sink drain opening and through the countertop.
10. Thread the rubber gasket, rubber washer, and lock nut onto the drain body and tighten with a plier. Then, add a rubber gasket and attach the tail pipe to the drain body, fixing the mounting nut.